



DIR[®]

Anode


7837
INSTRUCTION MANUAL

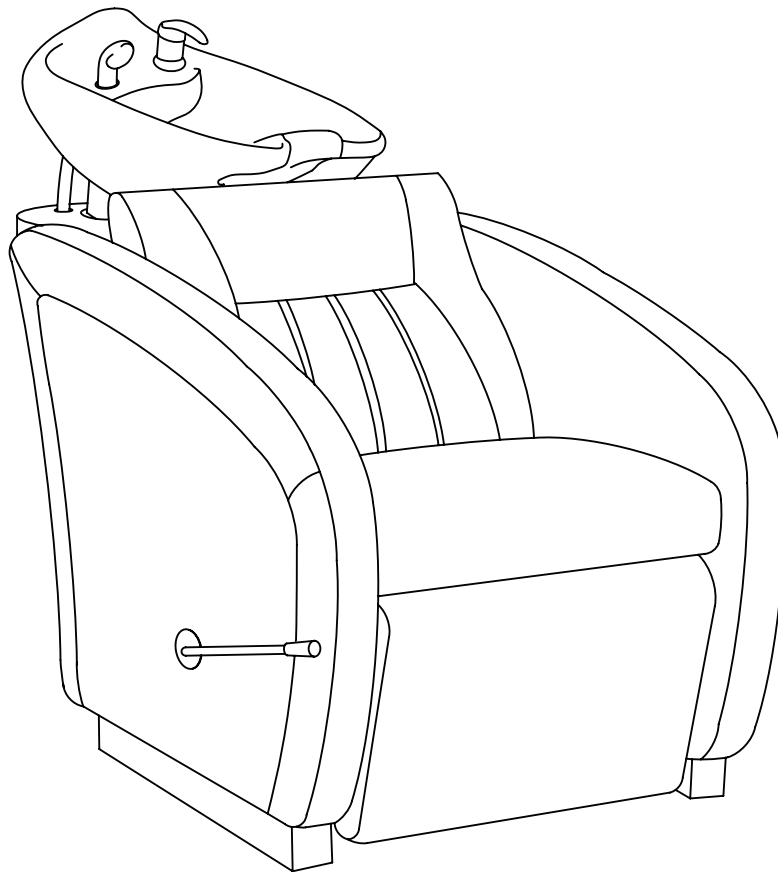


List of Parts & Tools

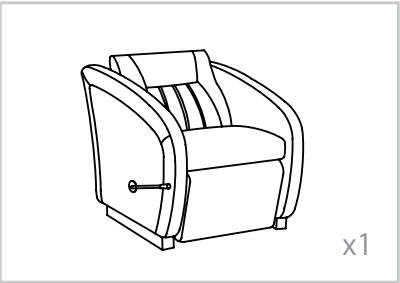


101001

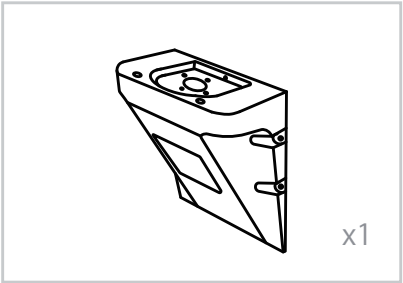


7001

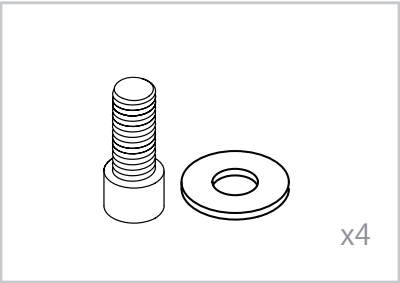


101003

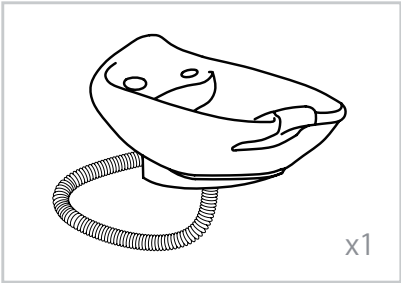


0350/0356

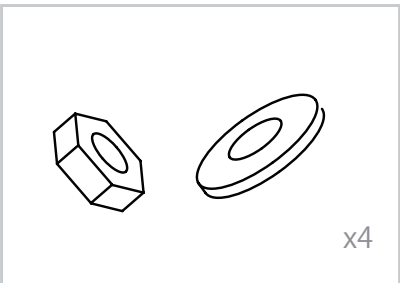


101005

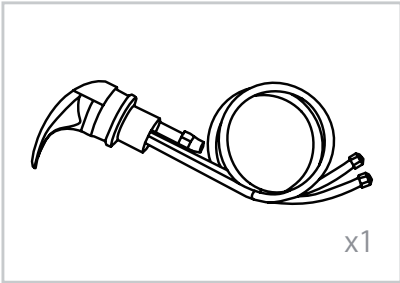


101006

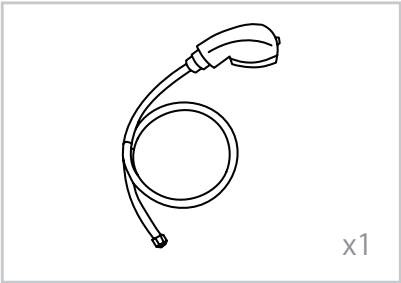


101007

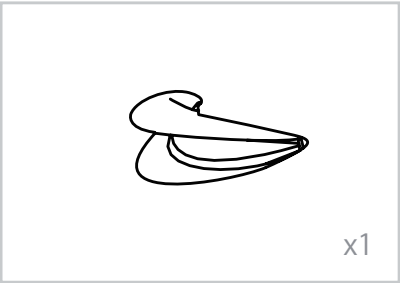


101008

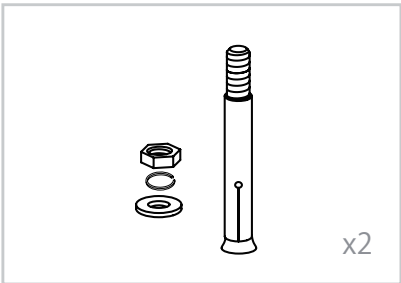

101009

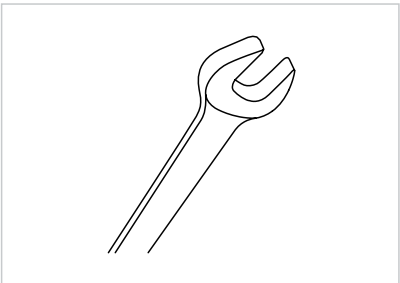



101010

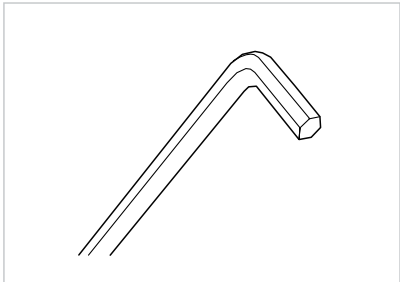



101011

Type	USA size	UK size
Water supply lines Adapter	5/8"	1/2"
Drain Hose Connector	1 1/4"	3.2cm


Assembly Instruction1

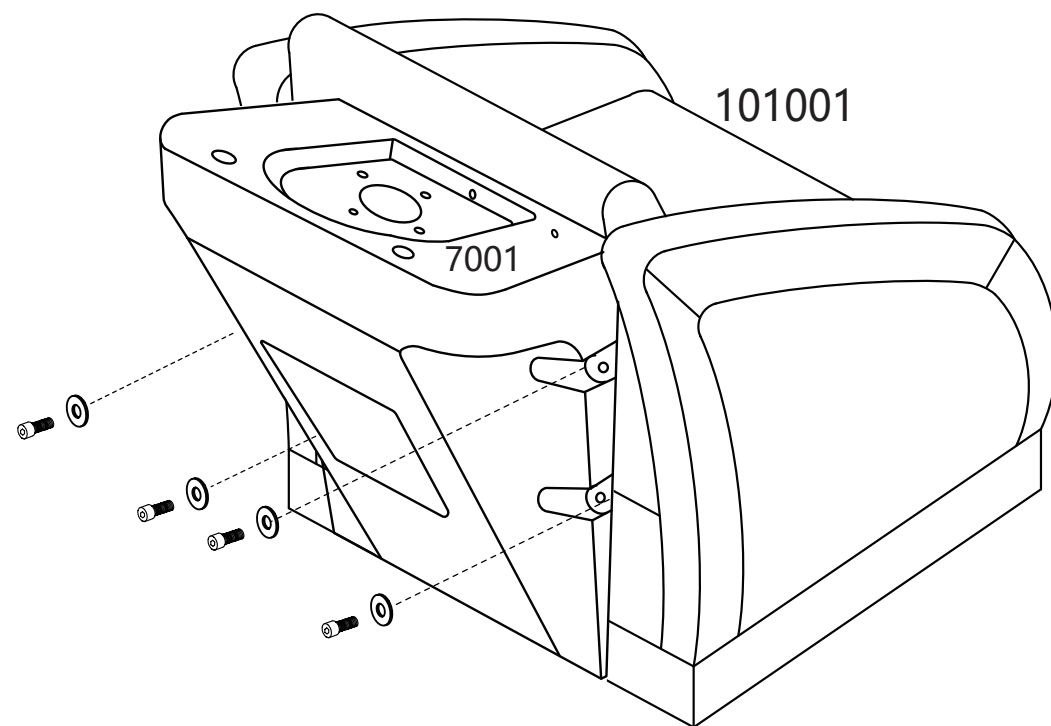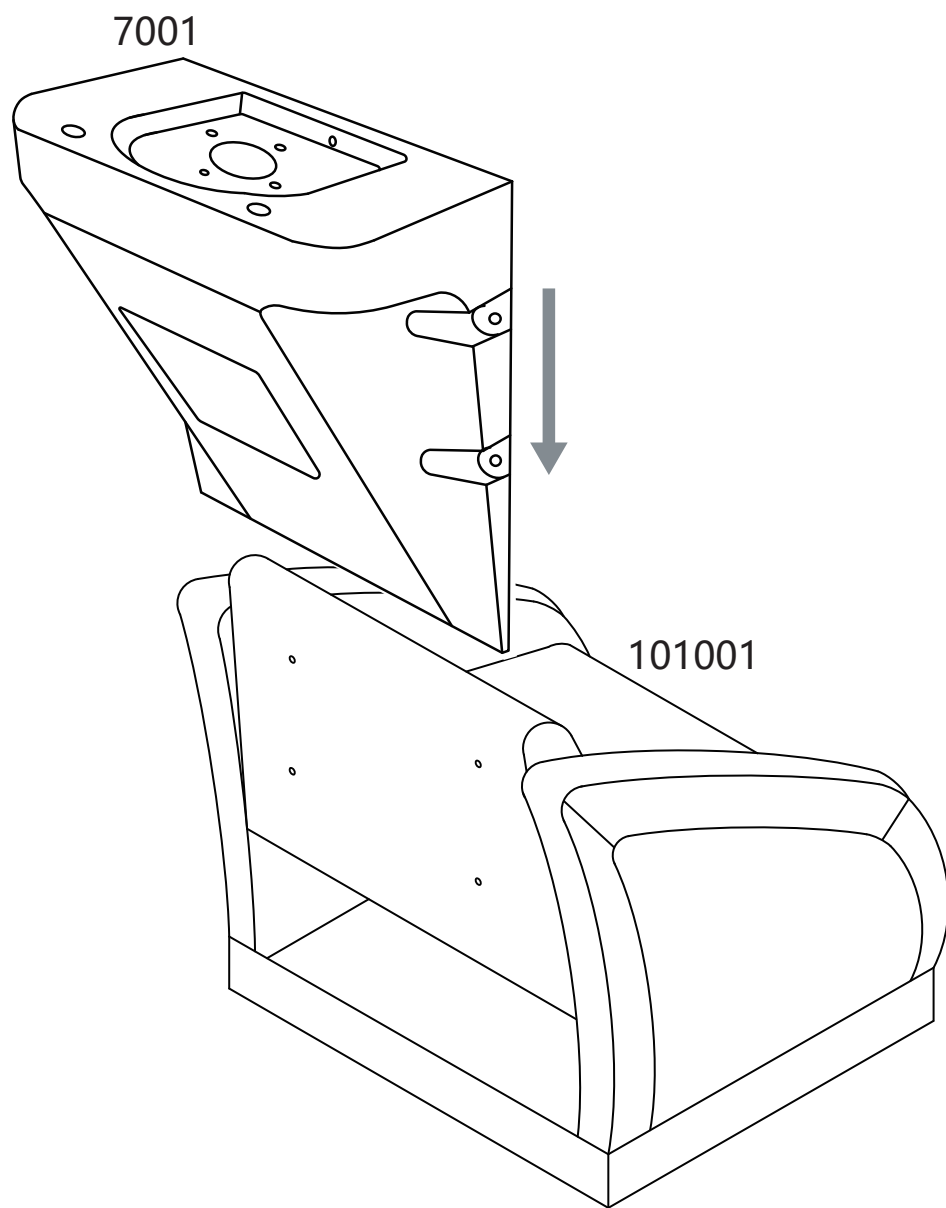


Assembly Instruction2

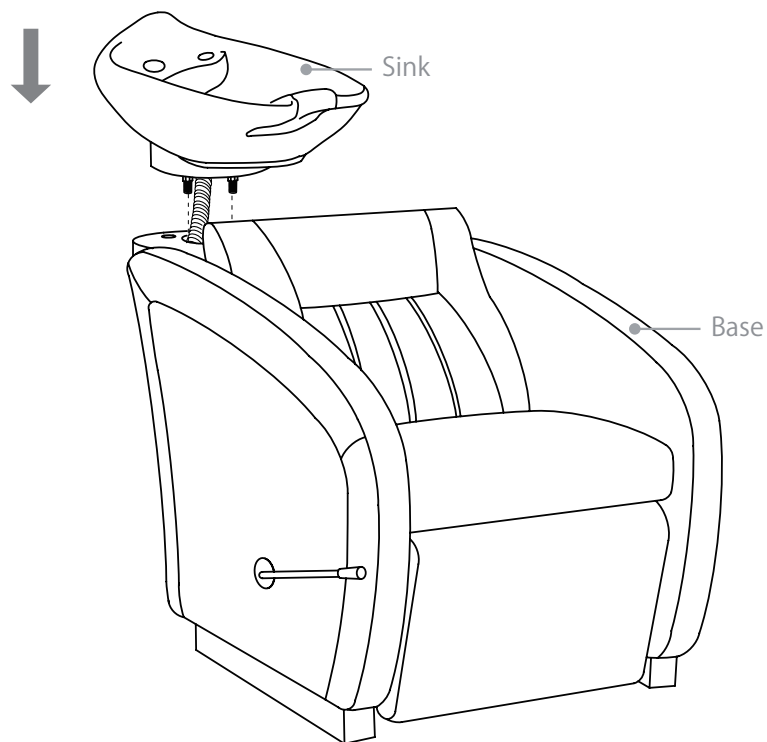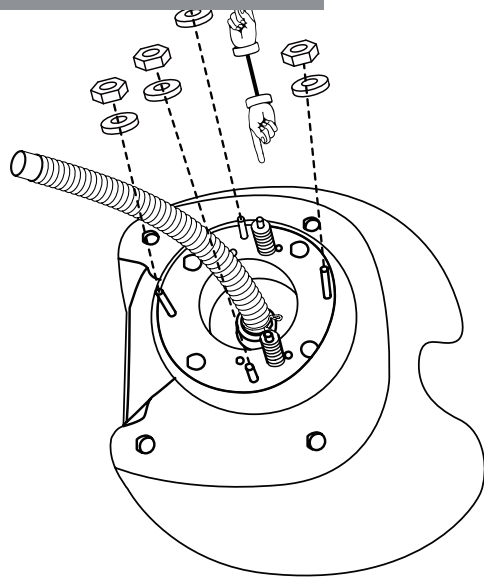

Front

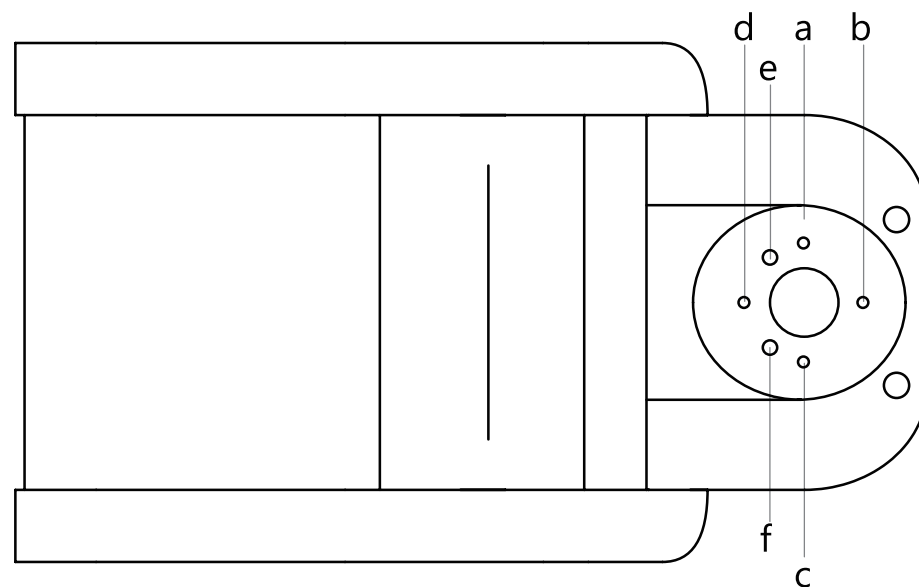




0350

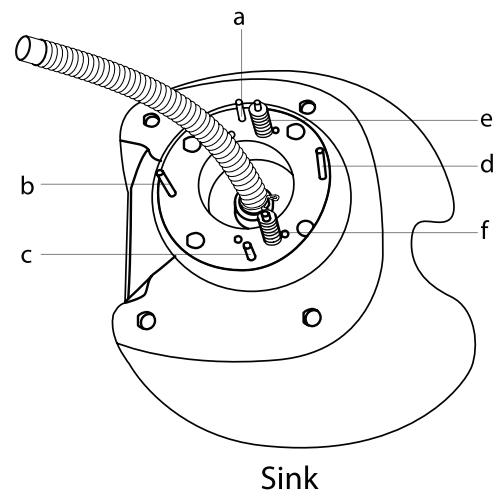



Front

Align the sink to the base as shown in the diagram.

0350

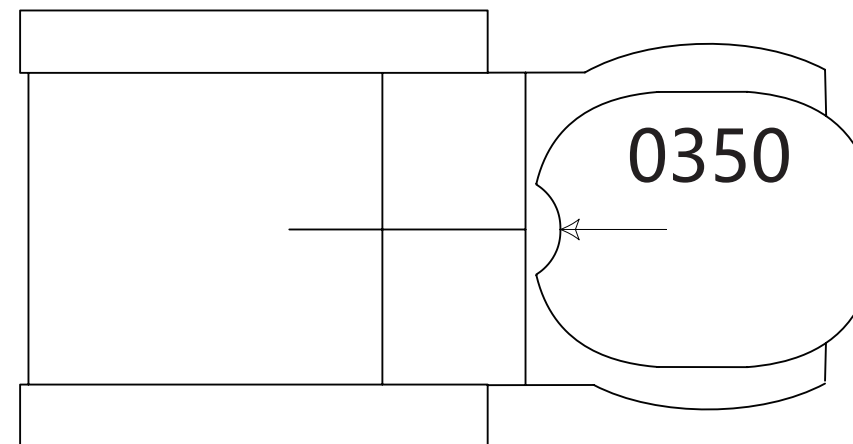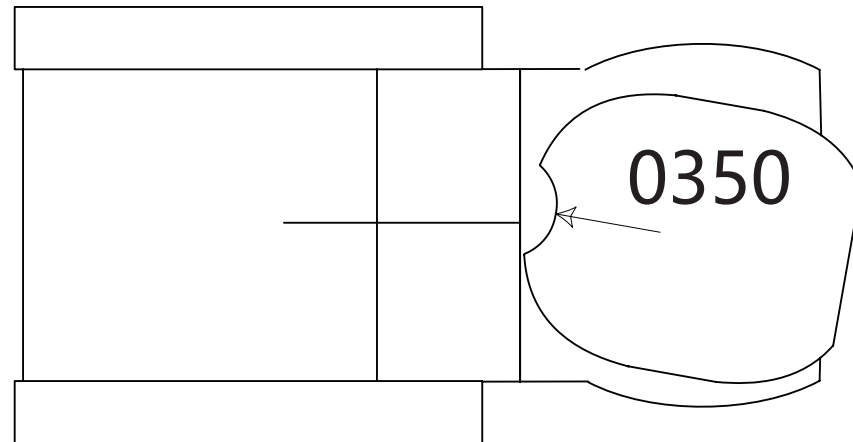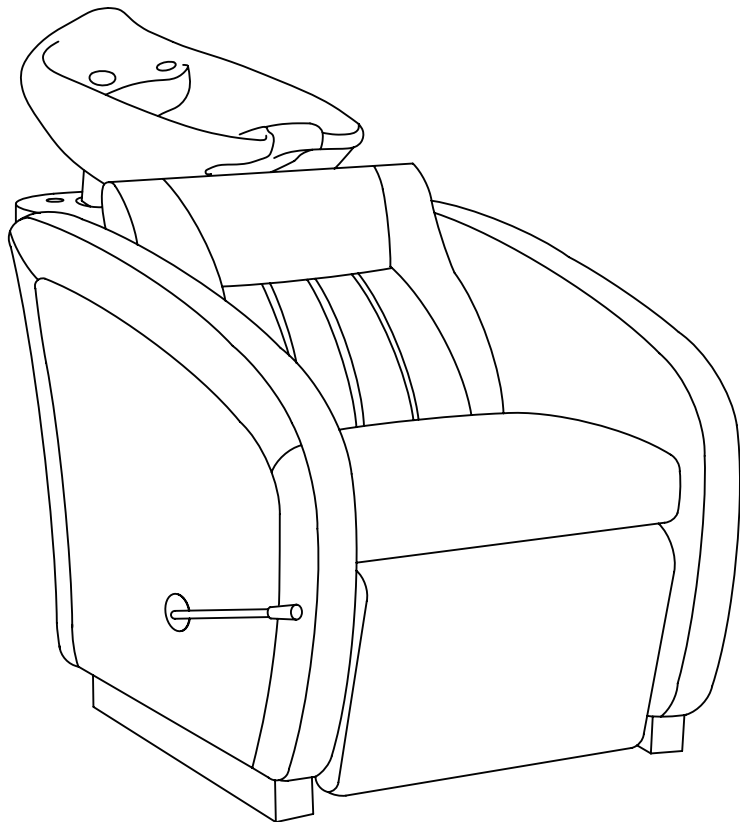


0350

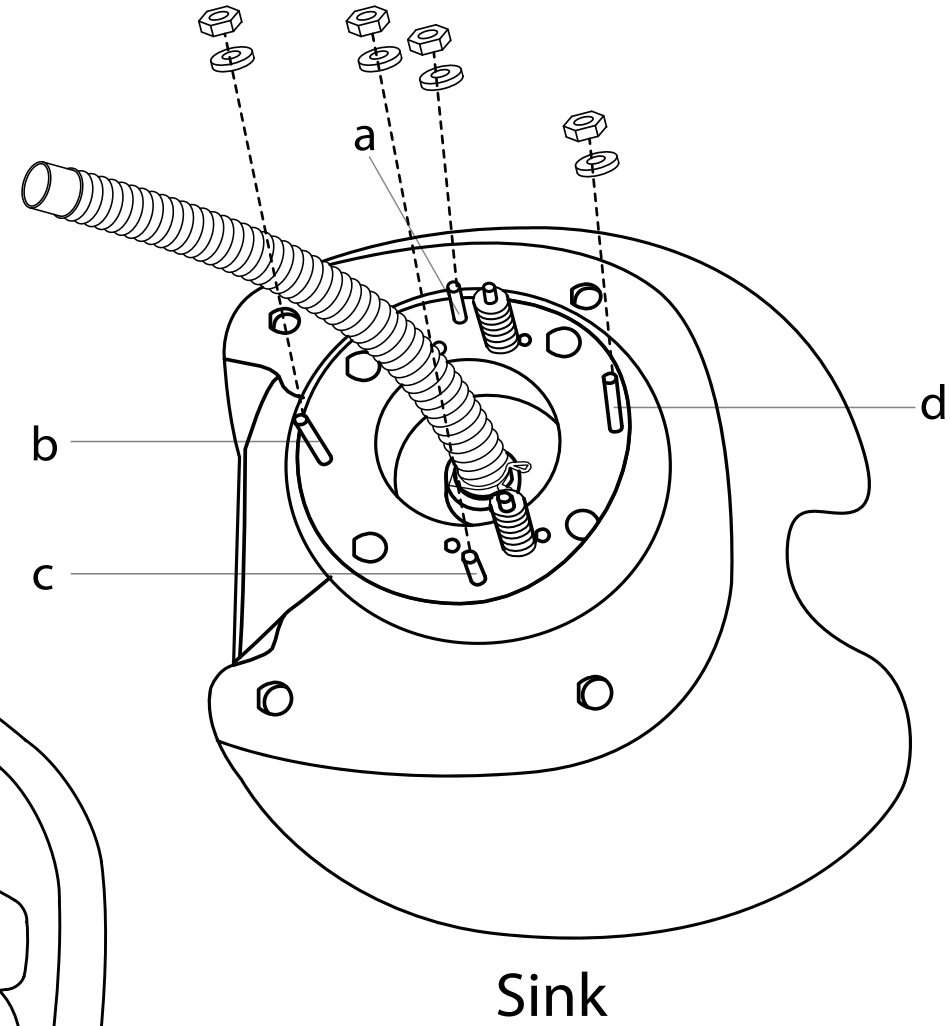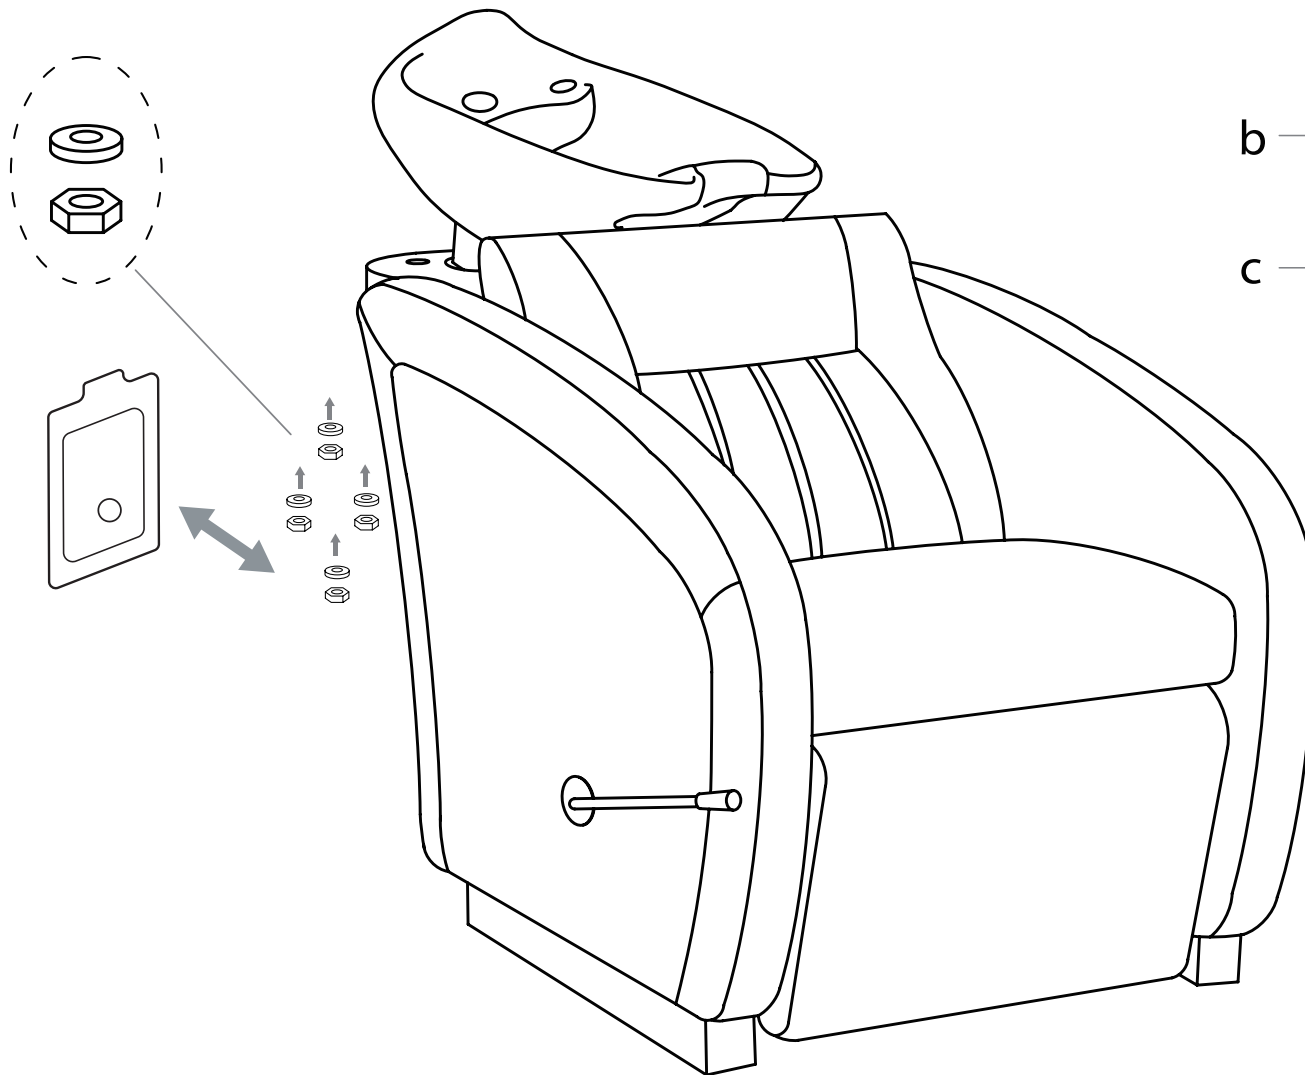

Faucet Set up


None Vacuum Breaker Sink

0350

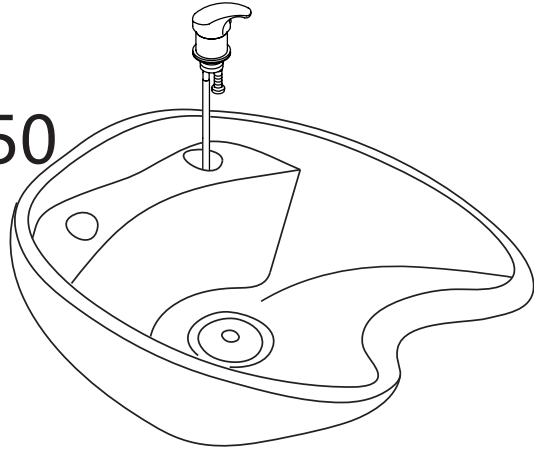

Vacuum Breaker Sink

0388

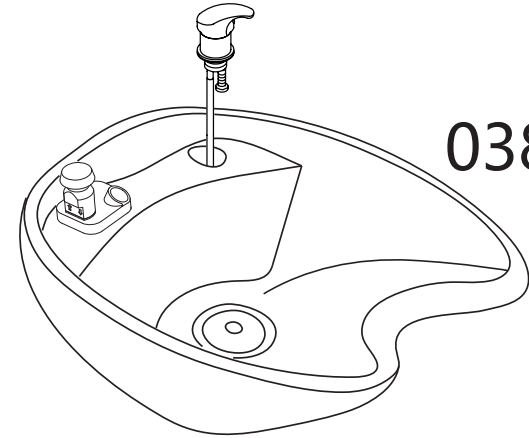

or

Metal plate

Red water pipe
(connect to Hot water)

Blue water pipe
(connect to Cold water)

Unscrew the metal plate from the faucet



STEP 1

Sink

Place the faucet on the sink and fasten using the metal plate


STEP 2

Sprayer Set Up Vacuum Breaker Sink

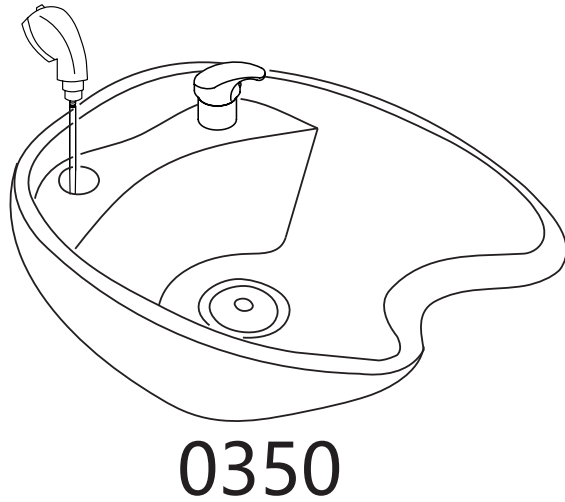


Unscrew the fastener from
the sprayerhead holder.

STEP 1




Fasten the sprayerhead holder to the sink with the plastic fastener.

STEP 2

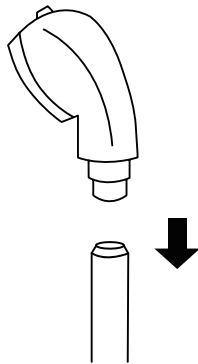


Unscrew the sprayerhead from the sprayer hose.

STEP 3




Place the sprayer hose from underneath through the sprayerhead
holder and fasten the sprayerhead to the sprayer hose.

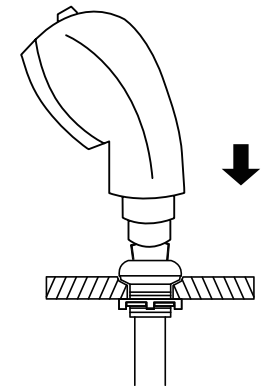


STEP 4


Sprayer Set Up None Vacuum Breaker Sink

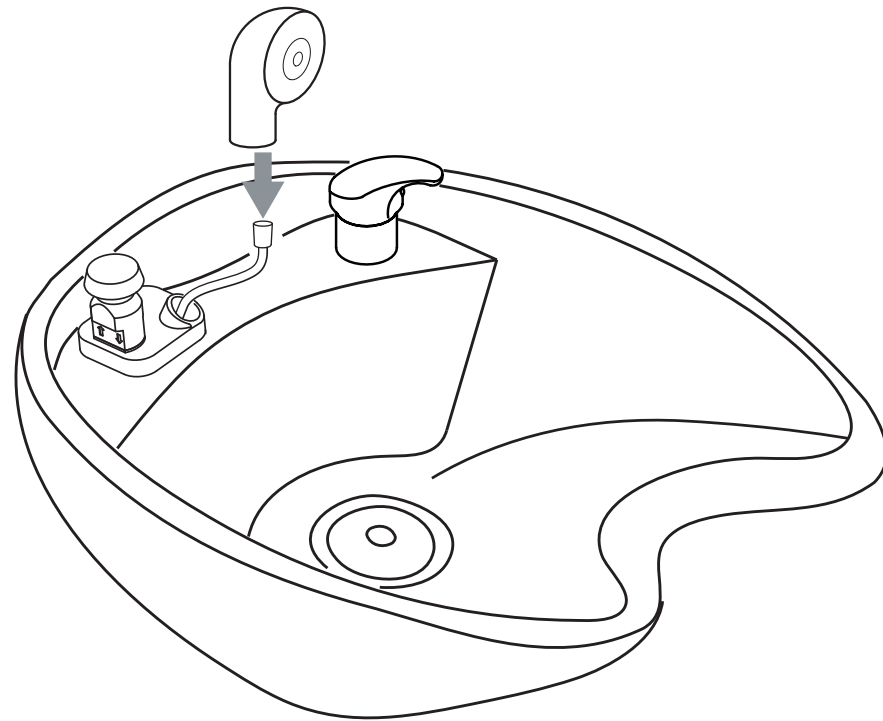

0388

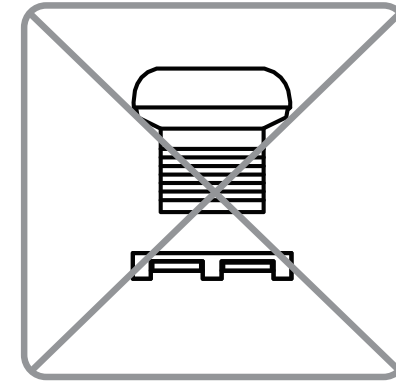


no need

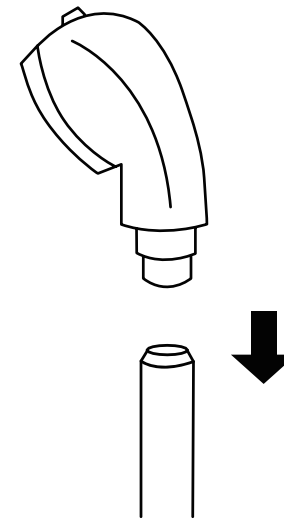


Unscrew the sprayerhead from the sprayer hose.

None Vacuum Breaker Sink

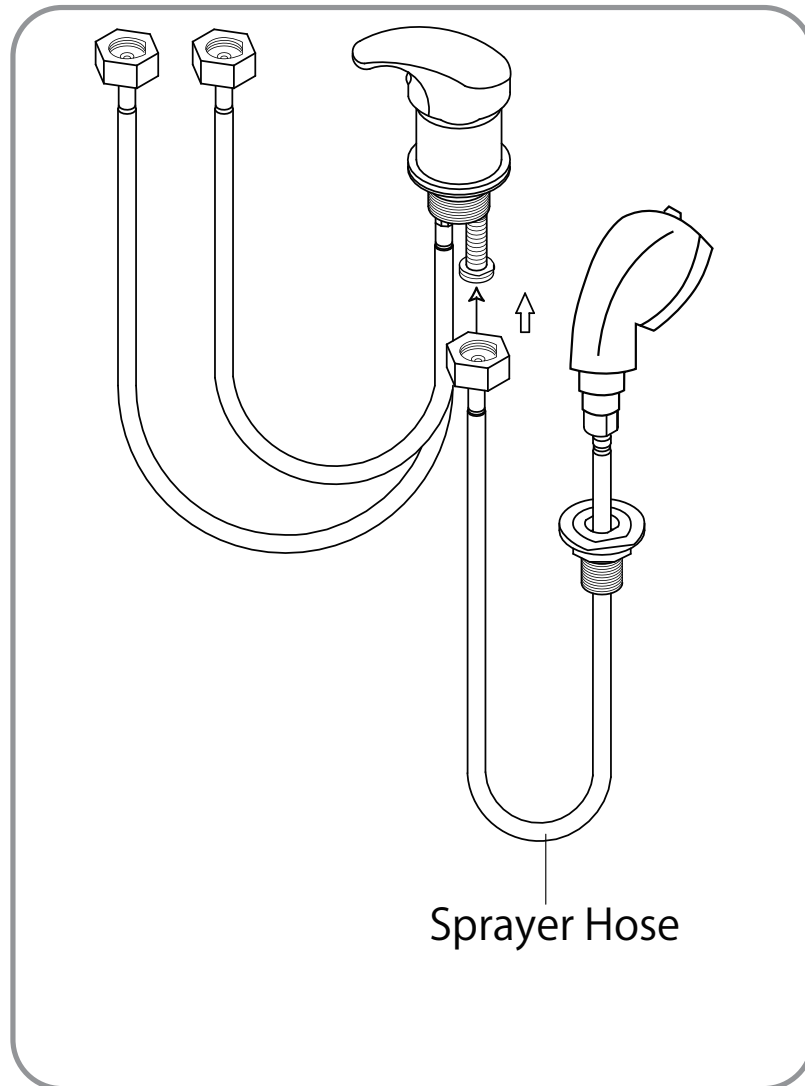



or

Vacuum Breaker Sink

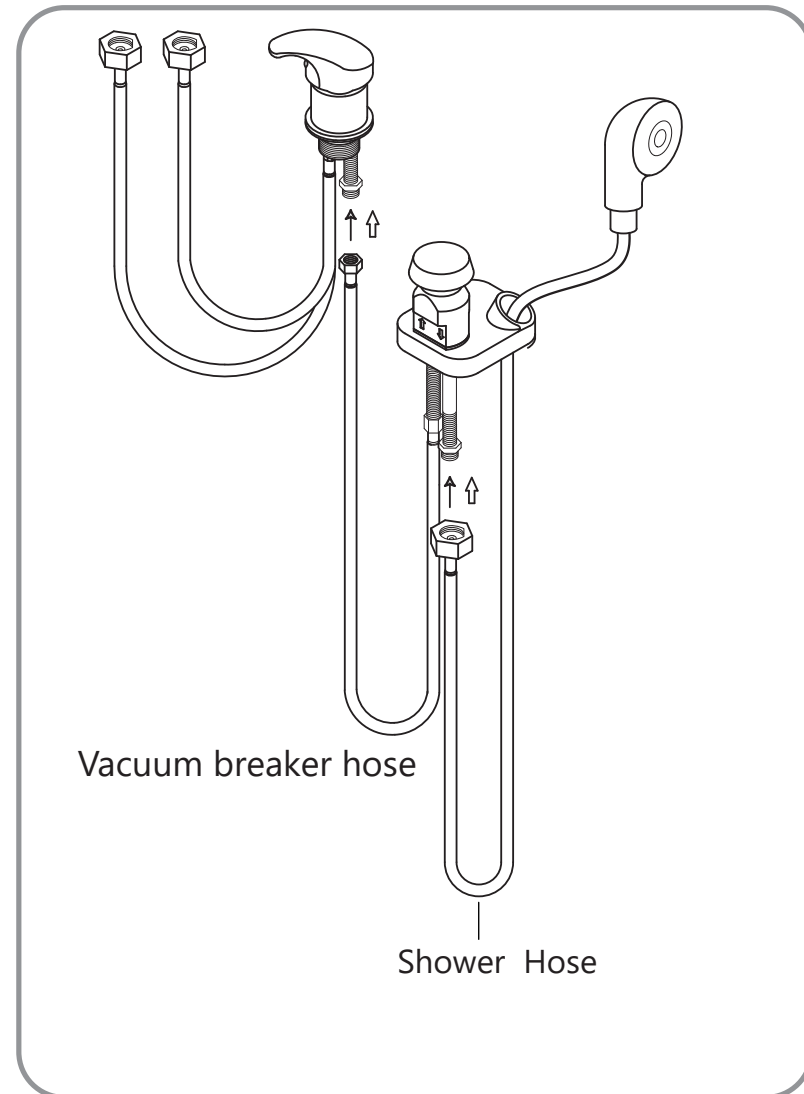


Plumbing setup:

*removable back panel to route both water supply lines and make all connections.

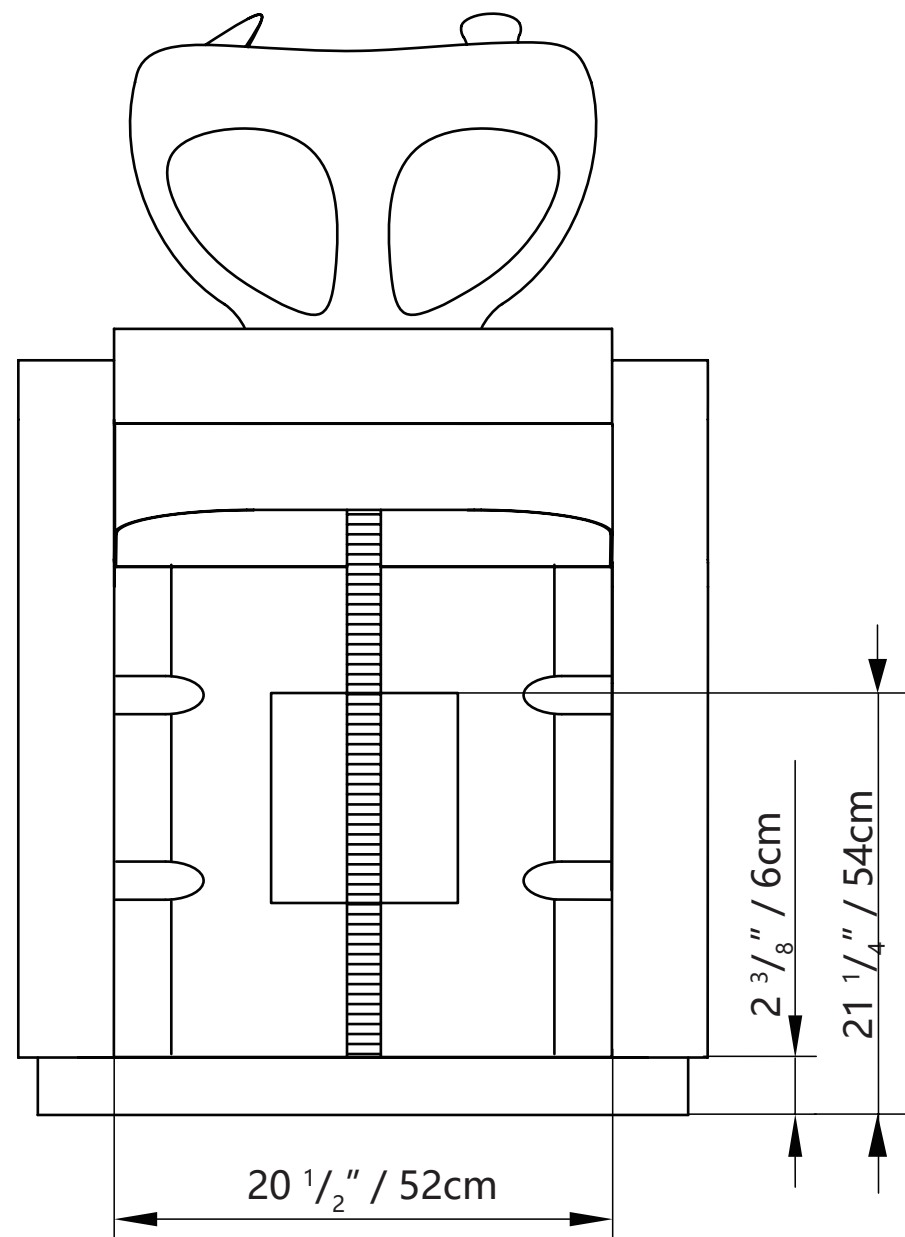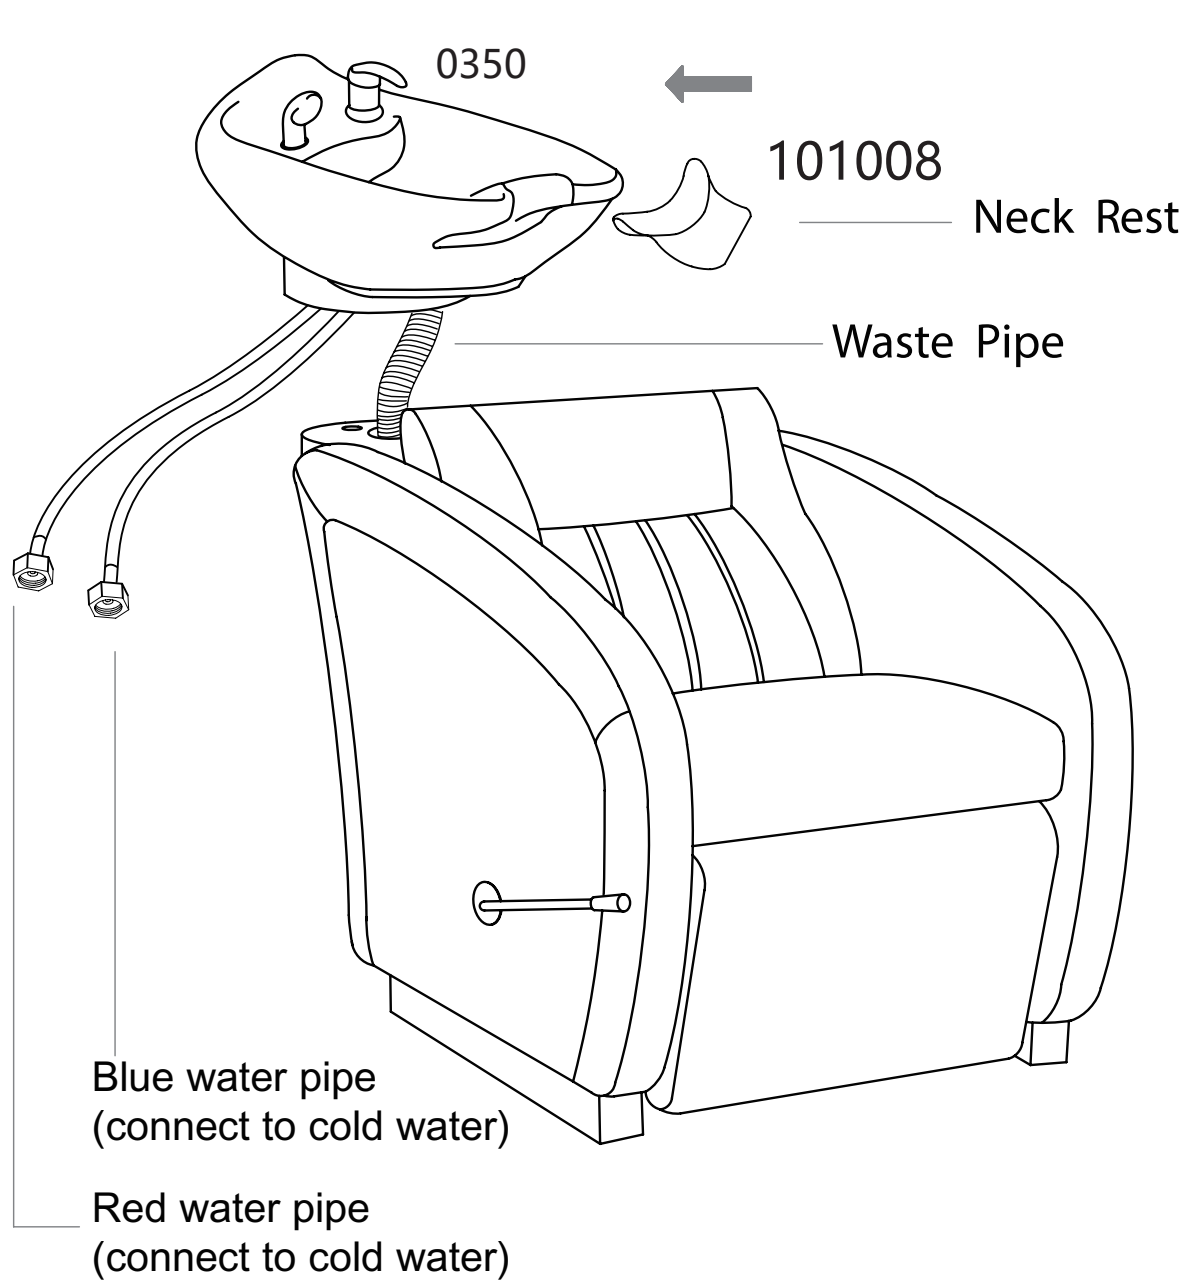

Floor plumbing setup:

Circle opening on removable back for drain pipe exit

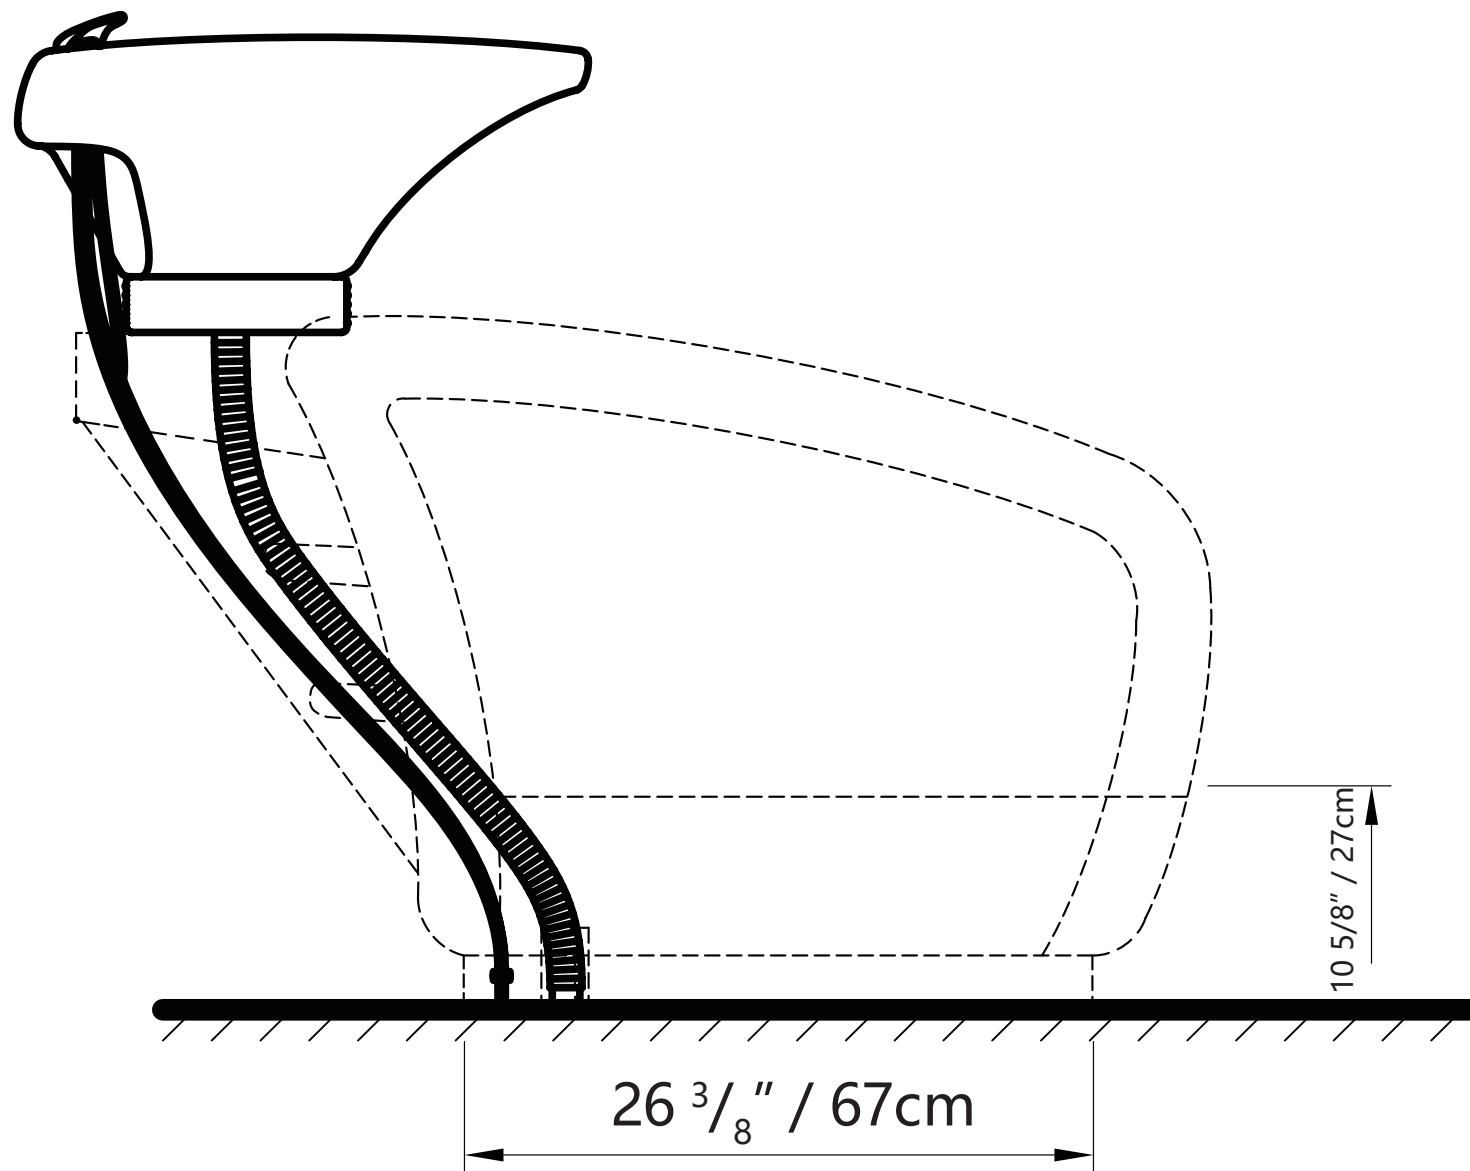


Please leave minimum $7 \frac{7}{8}'' / 20\text{cm}$ of space measuring from finished wall to the back of the sink to allow sinks tilting position.



Wall plumbing setup:

All connection pipes are enclosed within the base unit.

Water supply lines are routed into the unit via circle opening on the back of the base.

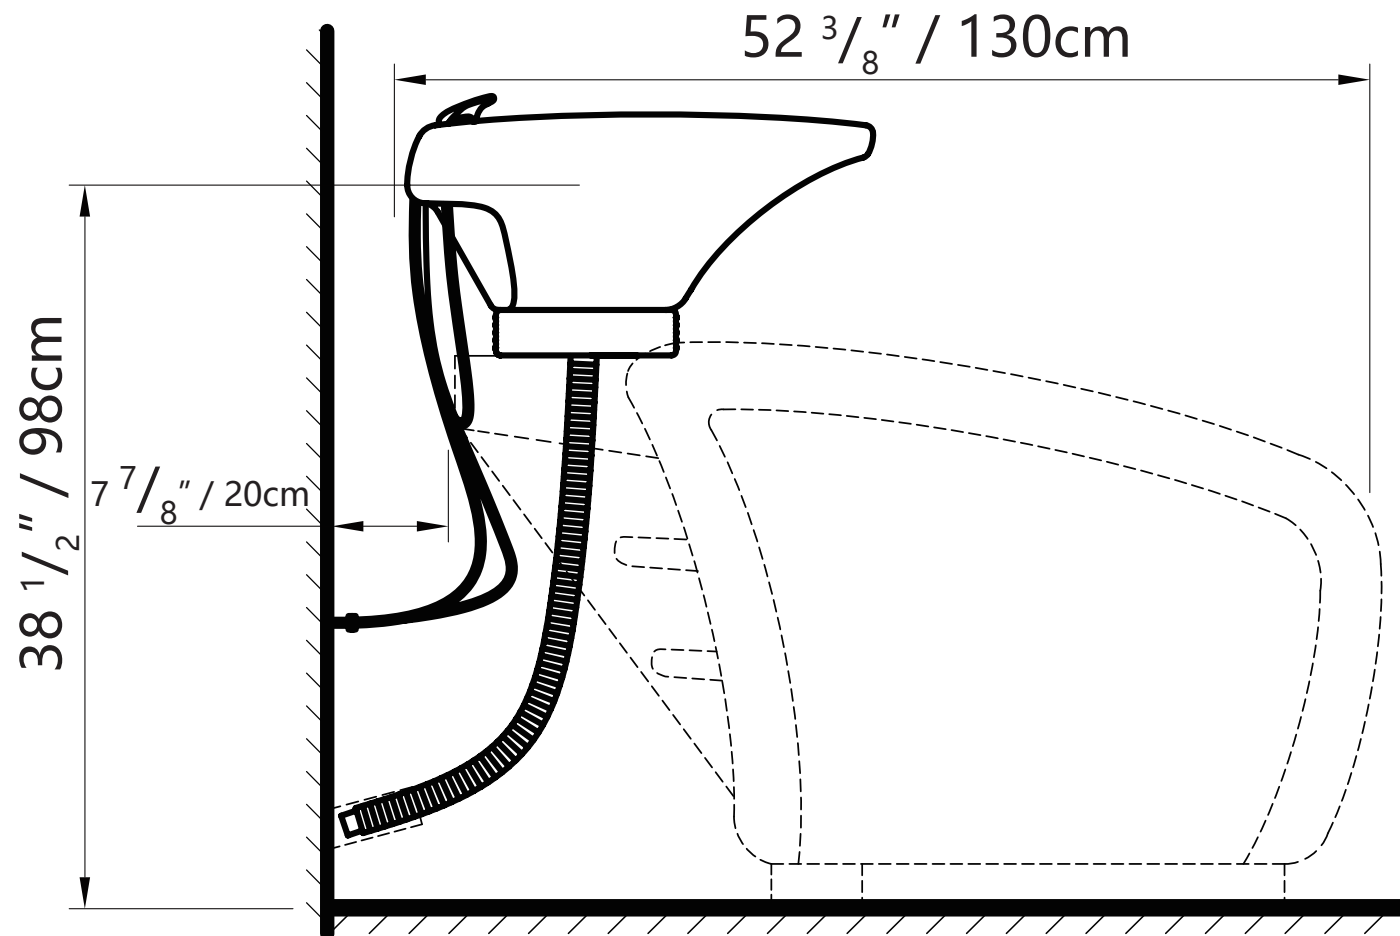


Secure the backwash on the floor by the provided floor anchors.

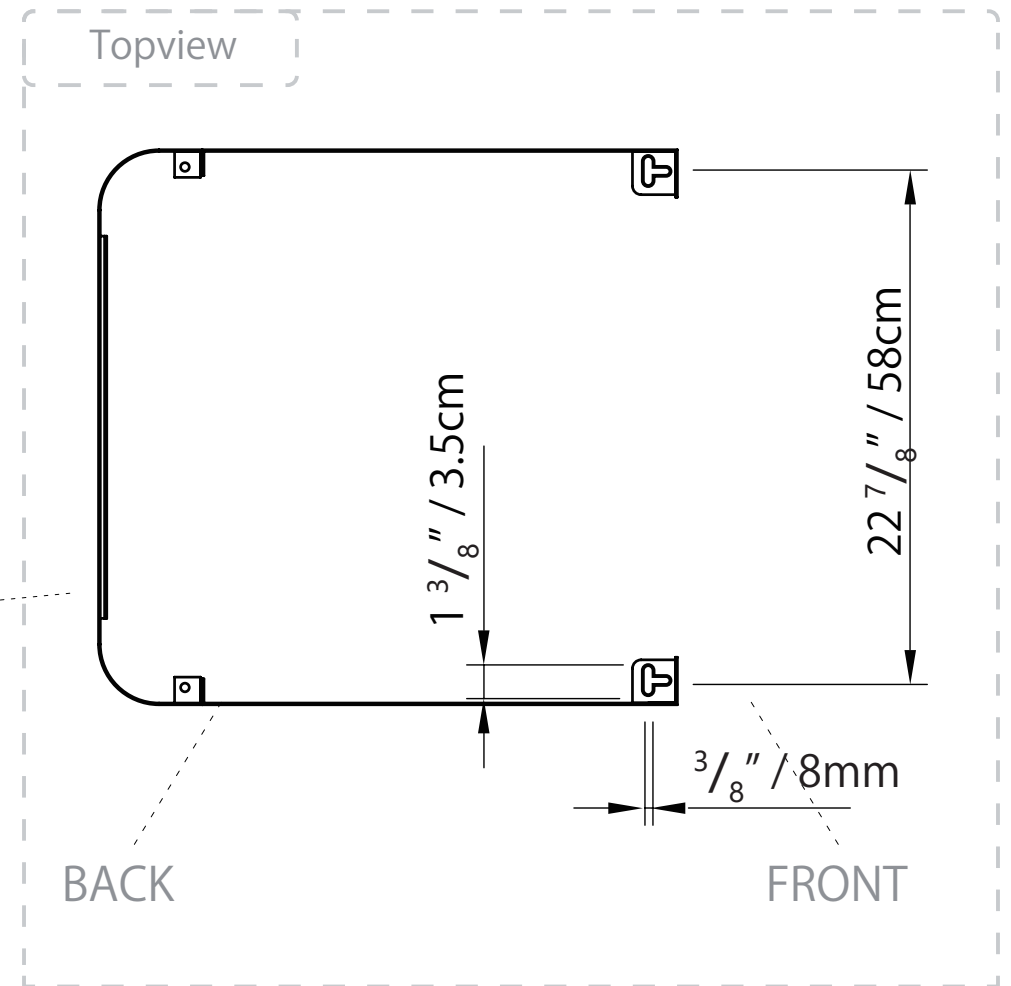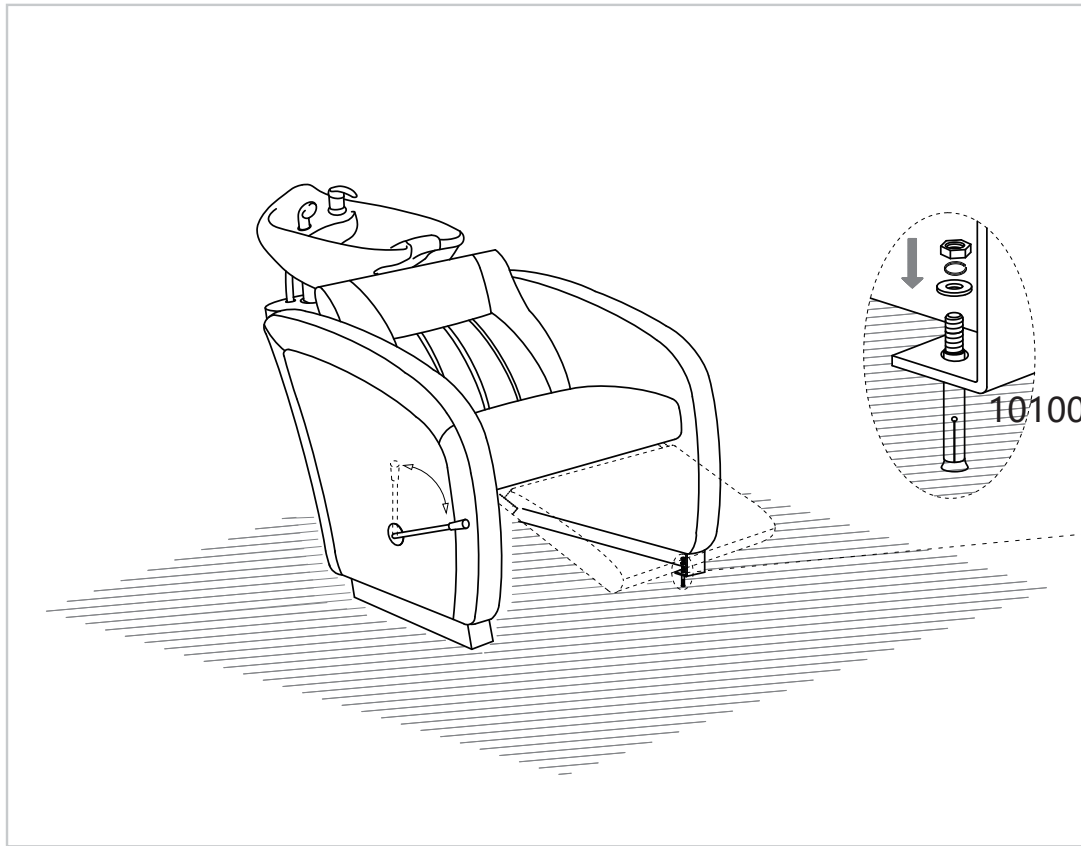


Product care




Brush away excess hair



Clean surface with damp cloth or use simple soap & water solution.



Avoid using corrosive cleaning agents such as bleaches.



Do not remove upholstery for cleaning

Warranty

The warranty period is one year. DIR warrants to you, the original buyer, that goods shall be free of defects in material and/or workmanship attributable to manufacture for one year from date of receipt of product. Damage resulting from improper handling after merchandise is received, or from exposure to weather or extreme atmospheric conditions is not covered by the warranty. For any other information please contact our support team:

DIR BIRMINGHAM

66 Rea Street South
Birmingham
B5 6LB
UK

Tel:
+44(0)121 6434777

Email:
dirlsalon@gmail.com

DIR LONDON

Unit 1 River Road
Business Park
33 River Road, Barking
Greater London
IG11 0DA
UK

Tel:
+44(0)20 8591 9310

Email:
dirlsalon@gmail.com

DIR NEW YORK

575 Underhill Blvd.
Suite 170
Syosset, NY 11791
USA

Tel:
+1 (718)628-6668
+1 (800)728-2008

Email:
sales@dirlsalonfurniture.com

DIR IRELAND

Unit 20, Goldenbridge Ind.
Estate Tyrconnell Road
Inchicore
Dublin 8
Republic of Ireland

Phone:
+353 (1) 429 7969

Email:
sales.ireland@dirgroup.ie